



Joining system
no waste
International patent



TCMG

Min. O.D. Diameter: 80 mm
Max. O.D. Diameter: 190 mm
Max. Core Length (Standard): 3000mm
Min. Thickness for Cardboard cores: 4/5 mm
Min. Thickness for Plastic cores: 2/3 mm

MIN. LENGTH OF CUT: 50 MM
MAX. LENGTH OF CUT (STANDARD): 3000MM

ELECTRICAL EQUIPMENT:
Matsushita/Panasonic(Standard) – Siemens on request
Supply Voltage: 380v 50 hz 3 ph. 3kw
Air Consumption: ca40NI/min 6 bar




Gavo Meccanica snc
via A.Gramsci, 2074 Larciano (PT)
Tel. (+39) 0573 838580
Fax (+39) 0573 850300
ITALY

www.gavomeccanica.com | info@gavomeccanica.com

full automatic and semiautomatic core cutter



Joining system
no waste
International patent

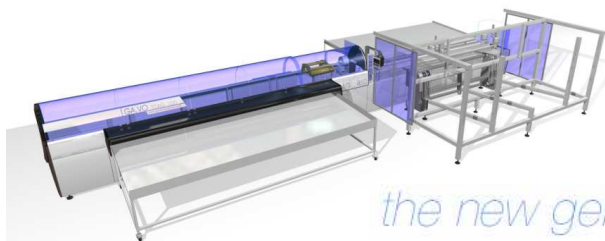

TCAG


the new generation for core cutters

General Specifications	Mod. 210	Mod. 330	Mod. 450
Material	Cardboard, Pvc and PP cores on request		
Max. Core Length	2000 mm	3000 mm	4000 mm
Max. Cut Length	2000 mm	3200 mm	4400 mm
Min. Cut Length	15 mm	15 mm	15 mm
Min. External Diameter	80 mm	80 mm	80 mm
Max. External Diameter	190 mm	190 mm	190 mm
Min. Cardboard Thickness	4/5 mm	4/5 mm	4/5 mm
Min. Plastic Thickness	2/3 mm	2/3 mm	2/3 mm
Optional			
Automatic Loader	CA 210	CA330	CA450
Semi Automatic Loader	CM210	CM330	CM450
Discharge Station	RA210	RA330	RA450
Technical Details			
Electrical Equipment	Matsushita/Panasonic or Siemens on Request		
Supply Voltage	380v 50hz 3ph—6 Kw		
Compressed Air Pressure	Min. 6 Bar		

full automatic and semiautomatic core cutter




Joining system
no waste
International patent



TCSG

the new generation for core cutters

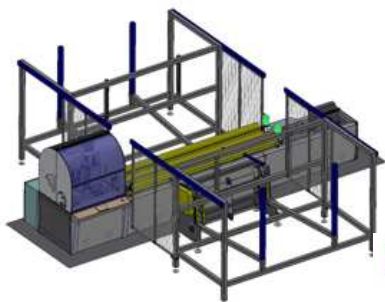

General Specifications	Mod. 200	Mod. 300	Mod. 400
Material	Cardboard, Pvc and PP cores on request		
Max. Core Length	2000 mm	3000 mm	4000 mm
Max. Cut Length	2000 mm	3000 mm	4000 mm
Min. Cut Length	10 mm	10 mm	10 mm
Min. External Diameter	80 mm	80 mm	80 mm
Max. External Diameter	230 mm	230 mm	230 mm
Min. Cardboard Thickness	4/5 mm	4/5 mm	4/5 mm
Min. Plastic Thickness	2/3 mm	2/3 mm	2/3 mm

Optional

Automatic Loader	CA 200	CA300	CA400
Semi Automatic Loader	CM200	CM300	CM400
Discharge Station	RA200	RA300	RA400

Technical Details

Electrical Equipment	Matsushita/Panasonic or Siemens on Request		
Supply Voltage	380v 50hz 3ph—6 Kw		
Compressed Air Pressure	Min. 6 Bar		

full automatic and semiautomatic core cutter




Joining system
no waste
International patent



TCLG

the new generation for core cutters

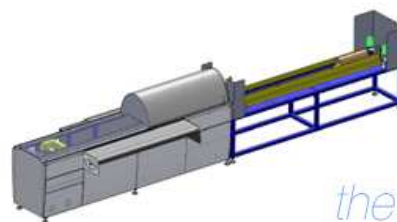

General Specifications	Mod. 200	Mod. 300	Mod. 400
Material	Cardboard and Pvc cores		
Max. Core Length	2000 mm	3000 mm	4000 mm
Max. Cut Length	2000 mm	3200 mm	4400 mm
Min. Cut Length	15 mm	15 mm	15 mm
Min. External Diameter	80 mm	80 mm	80 mm
Max. External Diameter	190 mm	190 mm	190 mm
Min. Cardboard Thickness	4/5 mm	4/5 mm	4/5 mm
Min. Plastic Thickness	2/3 mm	2/3 mm	2/3 mm

Optional

Automatic Loader	CA 200	CA300	CA400
Semi Automatic Loader	CM200	CM300	CM400
Discharge Station	RA200	RA300	RA400

Technical Details

Electrical Equipment	Only Panasonic Version		
Supply Voltage	380v 50hz 3ph—6 Kw		
Compressed Air Pressure	Min. 6 Bar		

full automatic and semiautomatic core cutter