


Flexible solutions: Delivery program for sizing cages

Type CM

Modular sizing cages


Patented geometry (pivot design) for the arms.
With 6 /9 /12 modules on the diameter and covers lay flats from 297 mm to 12400 mm.

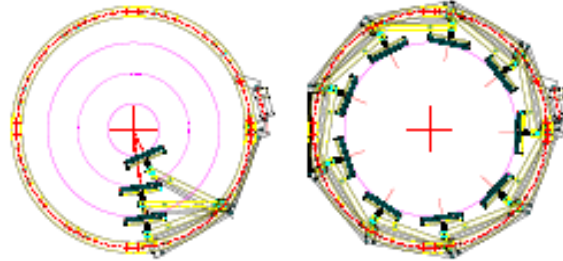

Type LC

Low cost sizing cages


Standard geometry for the arms, having up to 4 - 6 - 9 modules on the diameter and covers lay flats from 80 mm to 3015 mm.

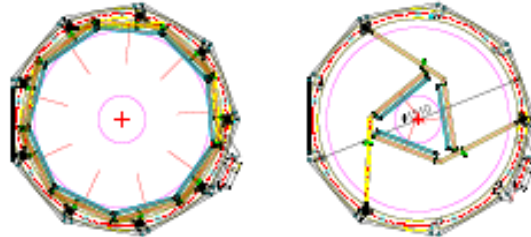

Type LS

Standard sizing cages


Standard mechanical movement for the arms.
The cages have 8 modules on the diameter, covers lay flats from 157 mm to 3770 mm.

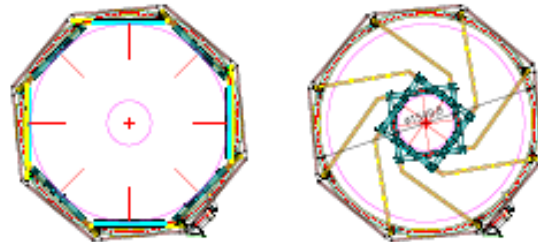

Type KN

Standard sizing cages


Standard geometry with curved and linked cage arms
Type KN have 8 modules on the diameter and covers lay flats from 250 mm to 2790 mm.

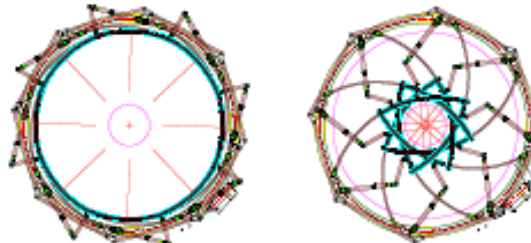

Type CC

Stabilizer centring the bubble

With standard mechanical movement for the cage arms. The cages have 4 - 6 modules for the diameter covering lay flats from 160 mm to 6120 mm.

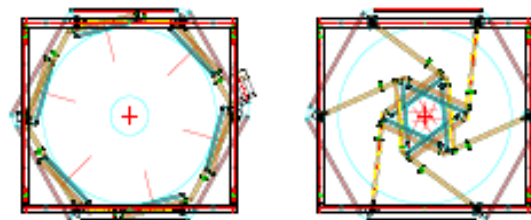

The guide arms can be offered in several types of materials:

Nylon - Silicone - Felt - Carbon fiber - Carbon with plasma coating - Pearl profiles

The calibration cages comes in up to 9 height levels, from 500 mm to 3000 mm

Looking for more information?

[Read more about calibration here.](#)

Please call: +45 4594 0600

Mail: falcon@falcon.dk

Lyngvej 16 B | DK-3400 Hillerød | tlf. +45 4594 0600 | fax +45 4582 1328 | falcon@falcon.dk

To unsubscribe from receiving future Falcon emails please [click here](#)
or give us a phone call on +45 4594 0600