

*Flexibility is standard*



## **Slit-Seal Unit**


**A new solution for blown film and converters from U.B.Tech.GmbH**



### **A new generation of slit-seal systems**

The unit will work direct on blown film lines up to web speed 250 m/min.

Film thickness range between 7 up to 250 micron and run with all kind of PE materials.

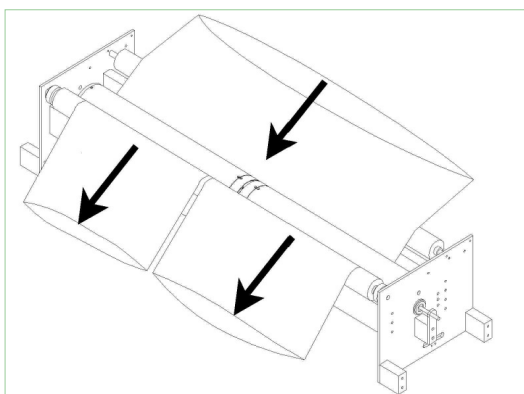



### **Revolutionary method of seal-sealing in three steps: Heating, sealing, cutting**

The seal plates are located in idler roll, water cooling is unnecessary.

Low energy consumption, as the unit seals with temperatures from 220 up to 350 °C. It is very easy to adjust the seal length.

The equipment can be offered for film width from 500 mm to 2500 mm. Minimum width between each slit seal is 50 mm.

The Profi Seal System is easy to integrate and install in your existing equipment.

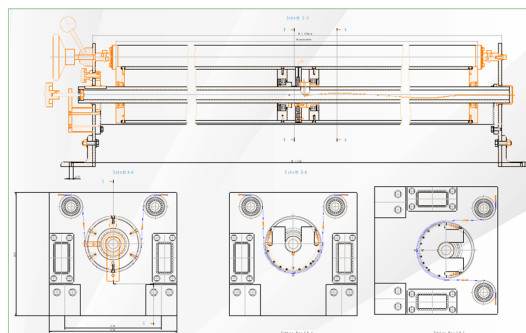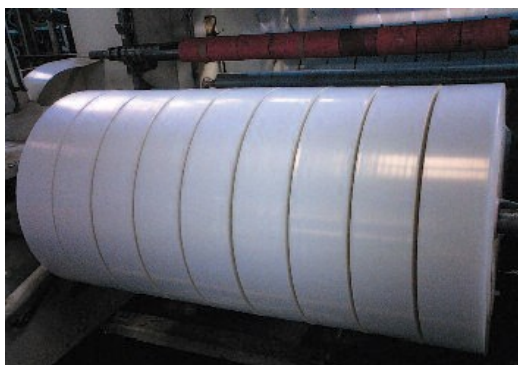

[View this message in a browser.](#)

**Call us: +45 4594 0600**

**Mail: [falcon@falcon.dk](mailto:falcon@falcon.dk)**

Lyngvej 16 B | DK-3400 Hillerød | phone +45 4594 0600 | fax +45 4582 1328 | [falcon@falcon.dk](mailto:falcon@falcon.dk)

Unsubscribe? Please [click here](#) or give us a phone call on +45 4594 0600